

Системы связи QE12, QE8

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ahj@nt-rt.ru || сайт: <https://lanbao.nt-rt.ru/>



Connection Cable QE12 series



Model					
2m	QE12-N4F2-P	QE12-N4F2-P-U	2m	QE12-N4G2-P	QE12-N4G2-P-U
5m	QE12-N4F5-P	QE12-N4F5-P-U	5m	QE12-N4G5-P	QE12-N4G5-P-U

Connector				
Supply voltage	30VDC Max		LED Indication	Power:Green;Operation:Yellow
Nominal current	4A		Outer covering	PU
Insulation resistance	100MΩ		Beareing material	Nickel copper alloy
Temperature range	-30℃...90℃		Protection degree	IP67
Output	PNP			
Connection Cable				
Material	PVC	PU	Core wire	4*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ5.2mm			

Dimensions

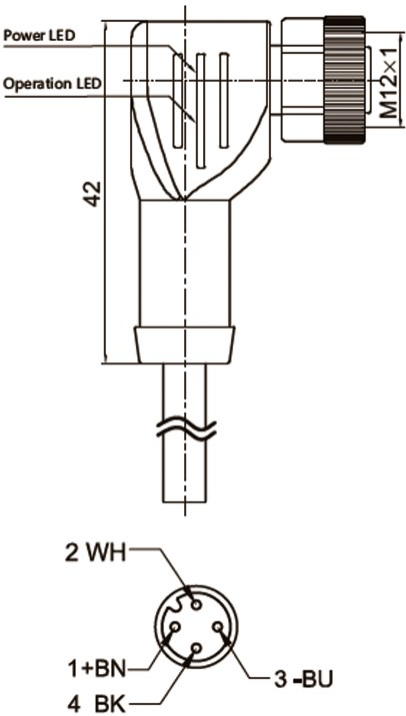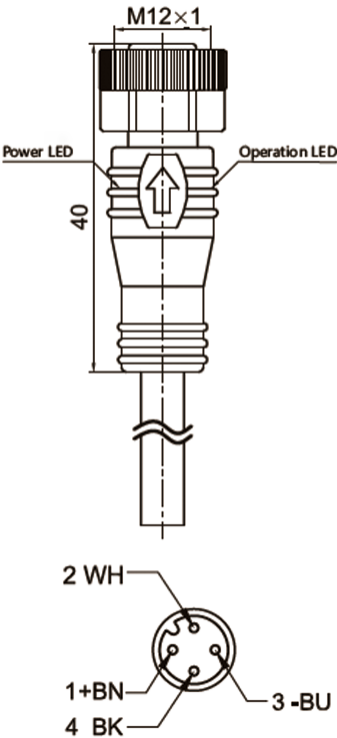



Connection Cable QE12 series




Model					
2m	QE12-N4F2-N	QE12-N4F2-N-U	2m	QE12-N4G2-N	QE12-N4G2-N-U
5m	QE12-N4F5-N	QE12-N4F5-N-U	5m	QE12-N4G5-N	QE12-N4G5-N-U

Connector				
Supply voltage	30VDC Max		LED Indication	Power:Green;Operation:Yellow
Nominal current	4A		Outer covering	PU
Insulation resistance	100MΩ		Bearering material	Nickel copper alloy
Temperature range	-30°C...90°C		Protection degree	IP67
Output	NPN			
Connection Cable				
Material	PVC	PU	Core wire	4*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ5.2mm			

Dimensions

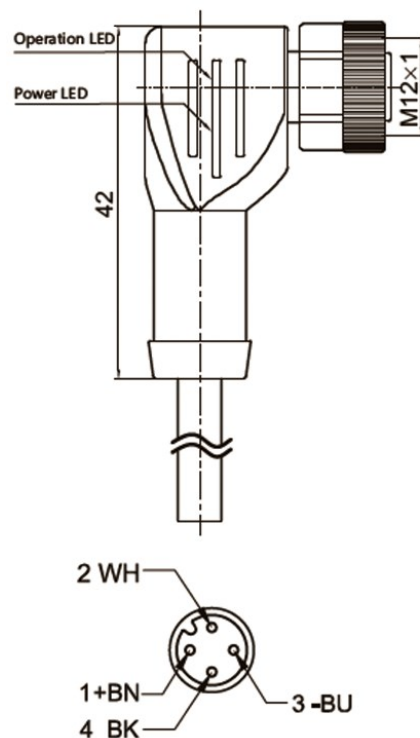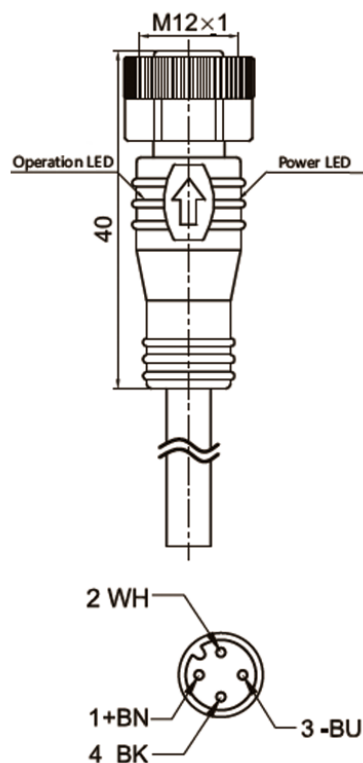

Connection Cable QE12 series

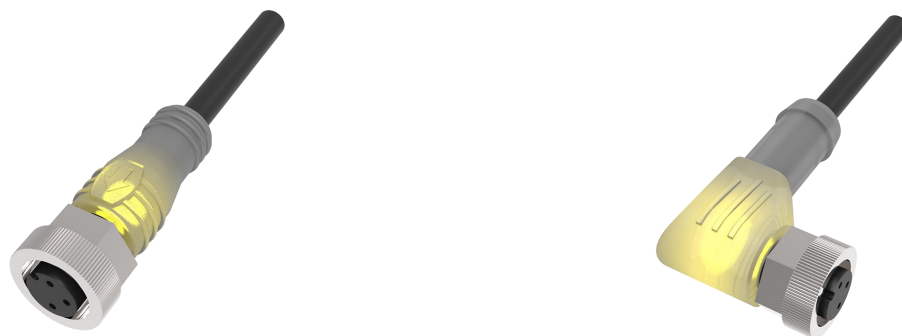

Model

2m	QE12-N3F2-N	QE12-N3F2-N-U	2m	QE12-N3G2-N	QE12-N3G2-N-U
5m	QE12-N3F5-N	QE12-N3F5-N-U	5m	QE12-N3G5-N	QE12-N3G5-N-U



Connector

Supply voltage	30VDC Max	LED Indication	Power:Green;Operation:Yellow
Nominal current	4A	Outer covering	PU
Insulation resistance	100MΩ	Bearering material	Nickel copper alloy
Temperature range	-30°C...90°C	Protection degree	IP67
Output	NPN		

Connection Cable

Material	PVC	PU	Core wire	3*0.34mm ² (0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

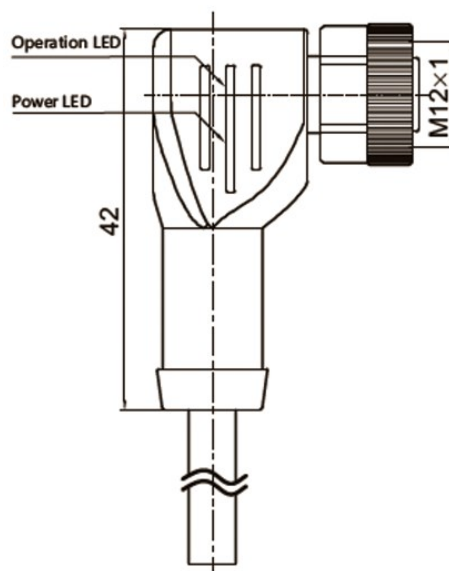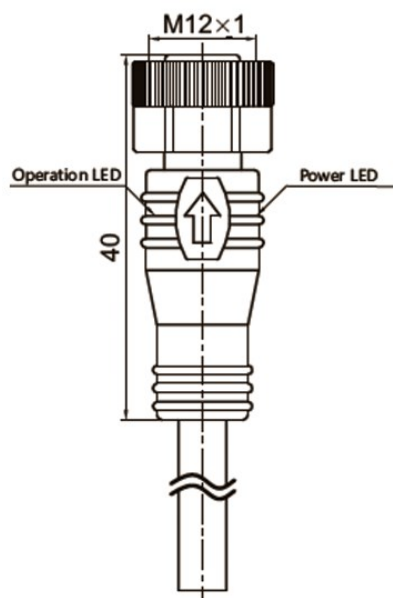



Connection Cable QE12 series



Model					
2m	QE12-N3F2-P	QE12-N3F2-P-U	2m	QE12-N3G2-P	QE12-N3G2-P-U
5m	QE12-N3F5-P	QE12-N3F5-P-U	5m	QE12-N3G5-P	QE12-N3G5-P-U

Connector			
Supply voltage	30VDC Max		LED Indication
Nominal current	4A		Power:Green;Operation:Yellow
Insulation resistance	100MΩ		Outer covering
Temperature range	-30°C...90°C		PU
Output	PNP		Bearering material
			Nickel copper alloy
			Protection degree
			IP67
Connection Cable			
Material	PVC	PU	Core wire
Colour	Black		3*0.34mm²(0.2*11)
Cable diameter	Φ4.4mm		Length
			2m/5m

Dimensions

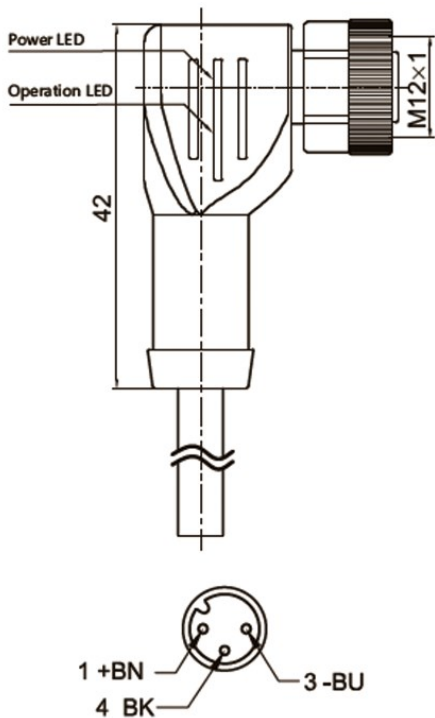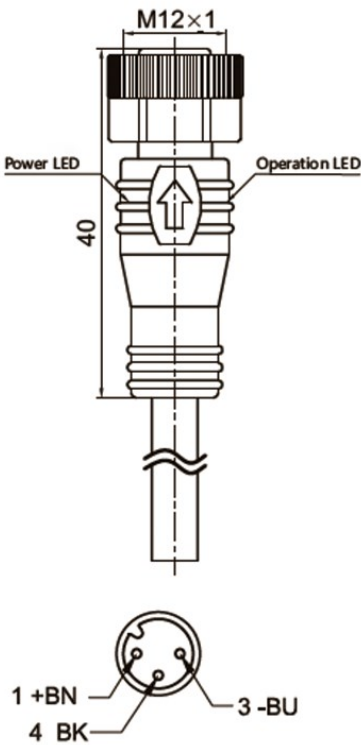


Connection Cable QE8 series



Model					
2m	QE8-W4F2	QE8-W4F2-U	2m	QE8-W4G2	QE8-W4G2-U
5m	QE8-W4F5	QE8-W4F5-U	5m	QE8-W4G5	QE8-W4G5-U

Connector				
Supply voltage	60VAC/DC		Outer covering	PVC
Nominal current	4A		Bearering material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-30°C...90°C			
Connection Cable				
Material	PVC	PU	Core wire	4*0.25mm²(0.1*32)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

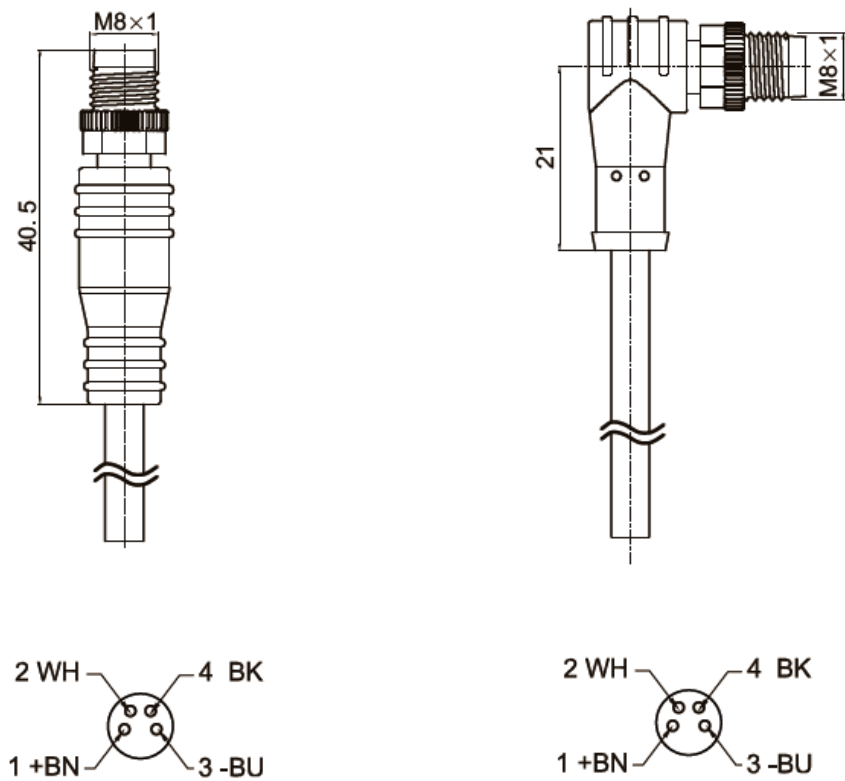


Connection Cable QE8 series



Model					
2m	QE8-W3F2	QE8-W3F2-U	2m	QE8-W3G2	QE8-W3G2-U
5m	QE8-W3F5	QE8-W3F5-U	5m	QE8-W3G5	QE8-W3G5-U

Connector				
Supply voltage	60VAC/DC		Outer covering	PVC
Nominal current	4A		Beareing material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-30°C...90°C			
Connection Cable				
Material	PVC	PU	Core wire	3*0.25mm²(0.1*32)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

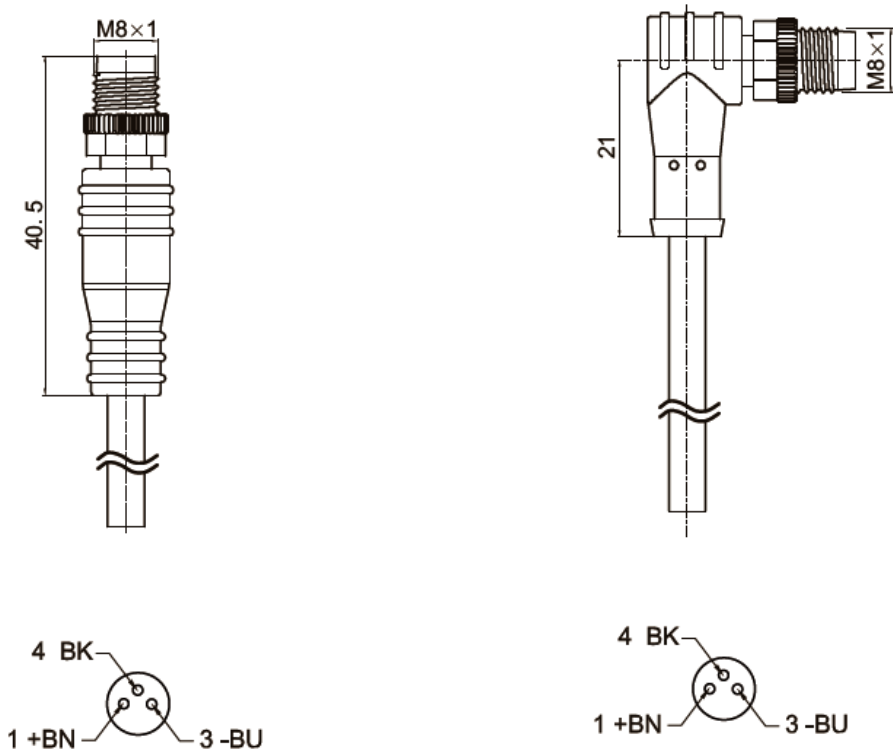


Connection Cable QE8 series



Model					
2m	QE8-N4F2	QE8-N4F2-U	2m	QE8-N4G2	QE8-N4G2-U
5m	QE8-N4F5	QE8-N4F5-U	5m	QE8-N4G5	QE8-N4G5-U
10m	QE8-N4F10	QE8-N4F10-U	10m	QE8-N4G10	QE8-N4G10-U

Connector				
Supply voltage	60VAC/DC		Outer covering	PVC
Nominal current	4A		Beareing material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-10°C...80°C			
Connection Cable				
Material	PVC	PU	Core wire	4*0.21mm²
Colour	Black		Length	2m/5m/10m
Cable diameter	Φ4.4mm			

Dimensions

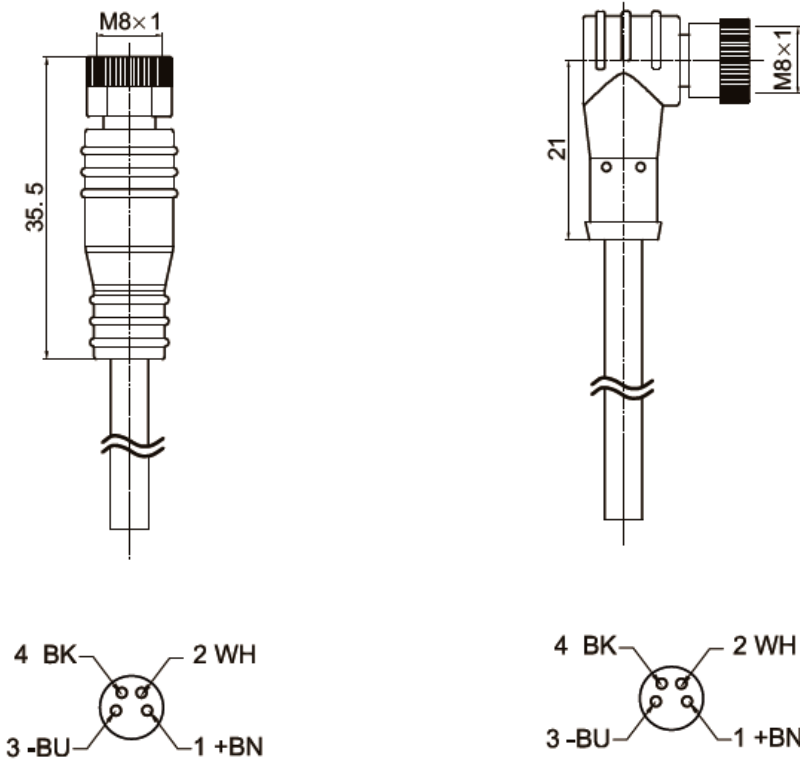

Connection Cable QE8 series




Model					
2m	QE8-N3F2	QE8-N3F2-U	2m	QE8-N3G2	QE8-N3G2-U
5m	QE8-N3F5	QE8-N3F5-U	5m	QE8-N3G5	QE8-N3G5-U

Connector			
Supply voltage	60VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-30°C...90°C		

Connection Cable				
Material	PVC	PU	Core wire	3*0.25mm²(0.1*32)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

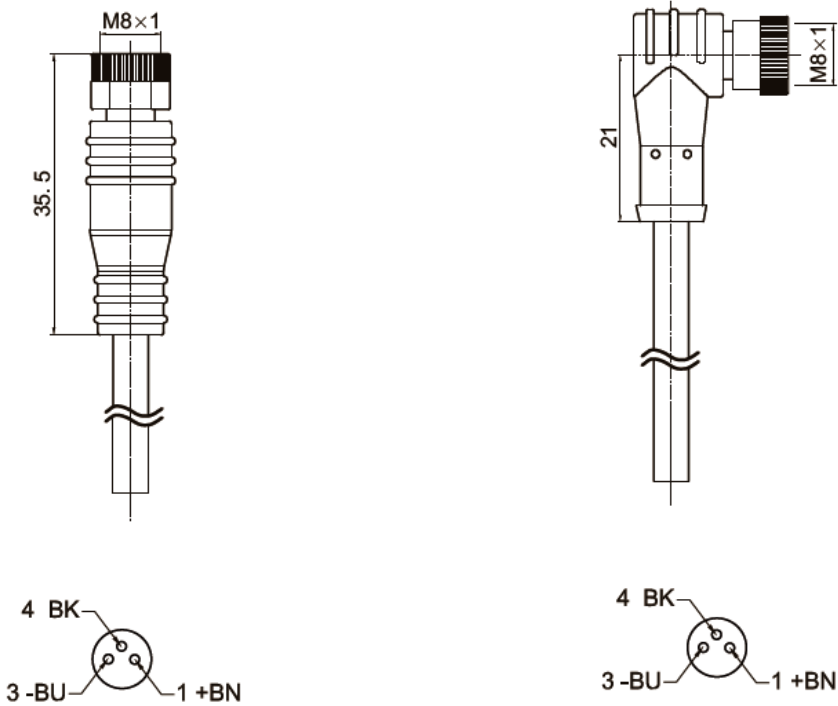


Connection Cable QE12 series



Model					
2m	QE12-W5F2	QE12-W5F2-U	2m	QE12-W5G2	QE12-W5G2-U
5m	QE12-W5F5	QE12-W5F5-U	5m	QE12-W5G5	QE12-W5G5-U

Connector				
Supply voltage	250VAC/DC		Outer covering	PVC
Nominal current	4A		Bearering material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-30°C...90°C			
Connection Cable				
Material	PVC	PU	Core wire	5*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ5.2mm			

Dimensions

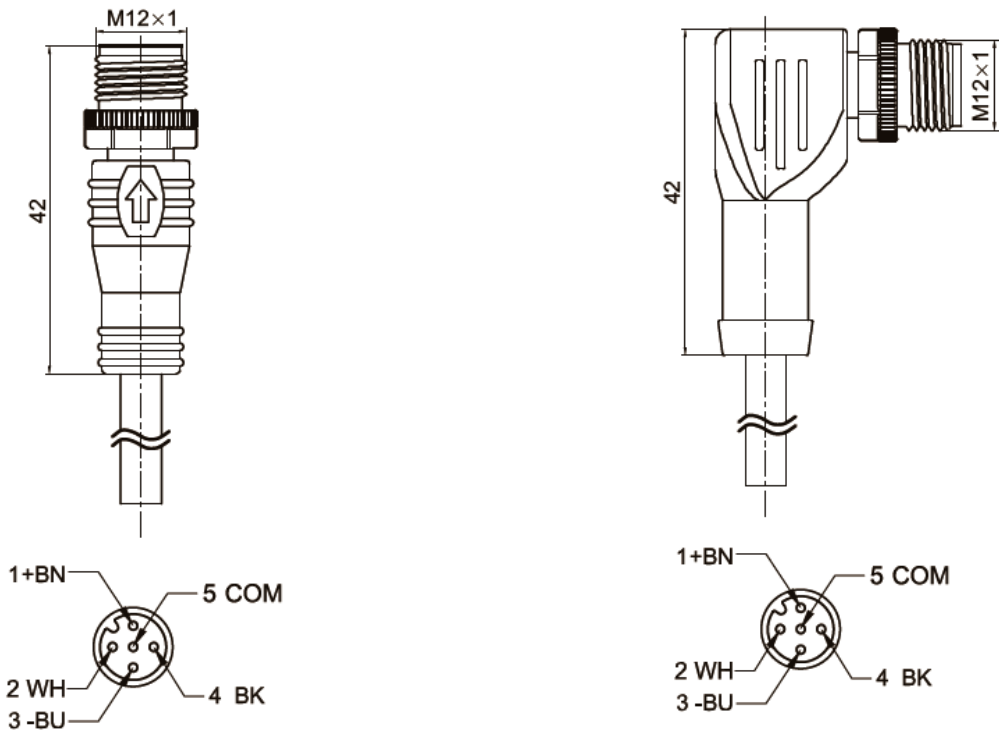


Connection Cable QE12 series



Model					
2m	QE12-W3F2	QE12-W3F2-U	2m	QE12-W3G2	QE12-W3G2-U
5m	QE12-W3F5	QE12-W3F5-U	5m	QE12-W3G5	QE12-W3G5-U

Connector				
Supply voltage	250VAC/DC		Outer covering	PVC
Nominal current	4A		Bearering material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-30°C...90°C			
Connection Cable				
Material	PVC	PU	Core wire	3*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

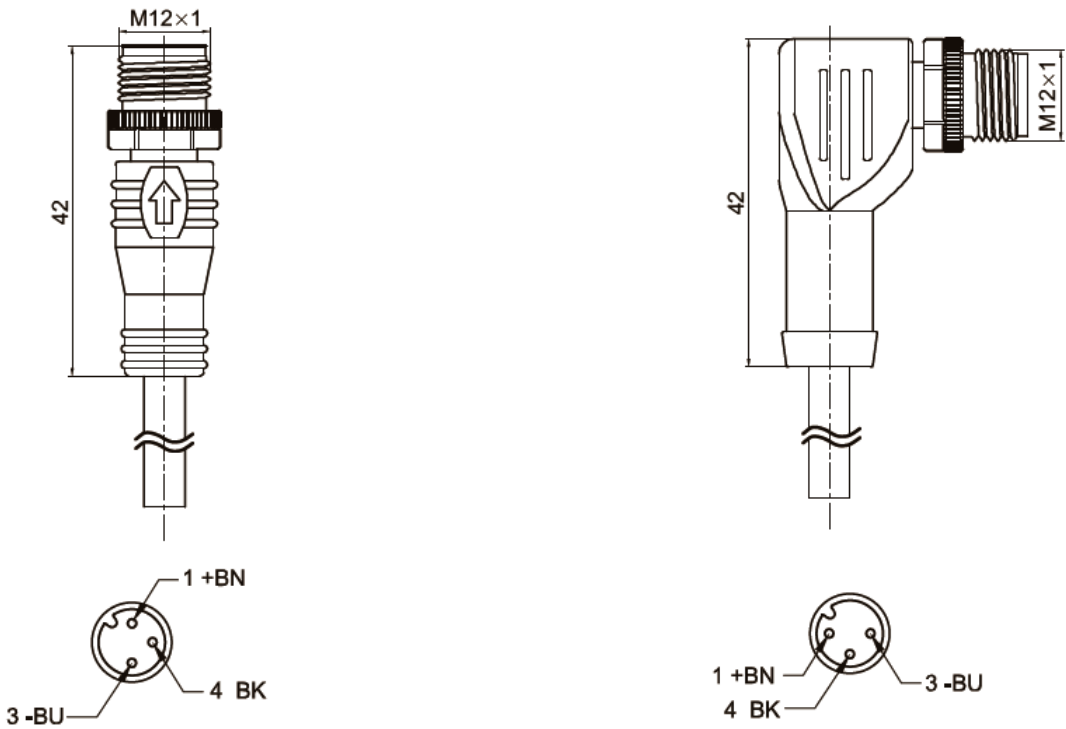



Connection Cable QE12 series



Model					
2m	QE12-W4F2	QE12-W4F2-U	2m	QE12-W4G2	QE12-W4G2-U
5m	QE12-W4F5	QE12-W4F5-U	5m	QE12-W4G5	QE12-W4G5-U

Connector				
Supply voltage	250VAC/DC		Outer covering	PVC
Nominal current	4A		Bearering material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-30°C...90°C			
Connection Cable				
Material	PVC	PU	Core wire	4*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ5.2mm			

Dimensions

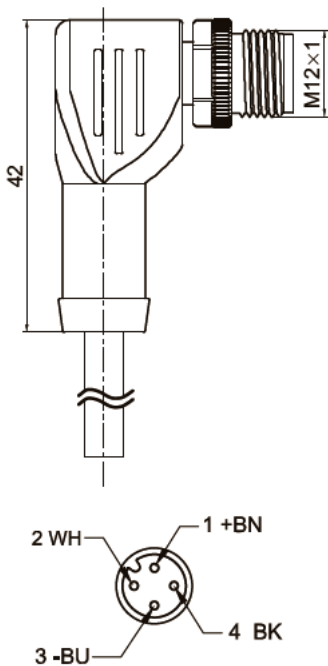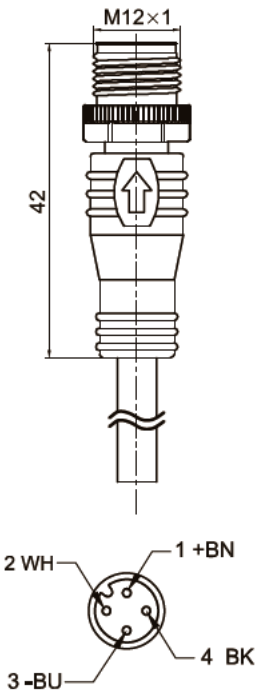

Connection Cable QE12 series




Model					
2m	QE12-N4F2	QE12-N4F2-U	2m	QE12-N4G2	QE12-N4G2-U
5m	QE12-N4F5	QE12-N4F5-U	5m	QE12-N4G5	QE12-N4G5-U

Connector			
Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-30°C...90°C		

Connection Cable				
Material	PVC	PU	Core wire	4*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ5.2mm			

Dimensions

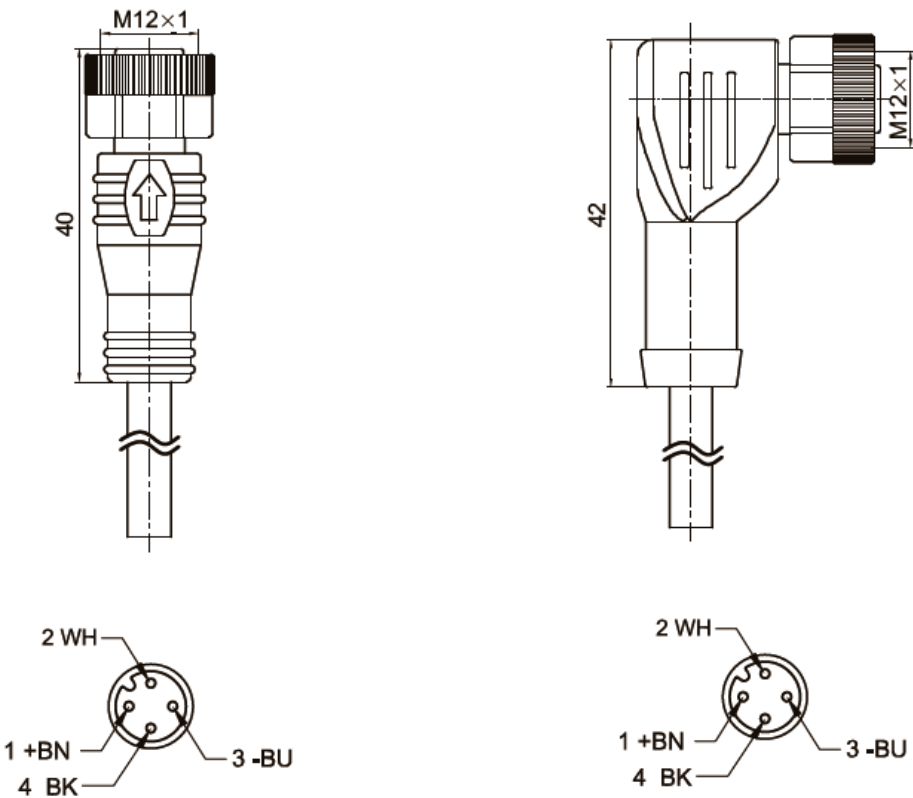

Connection Cable QE12 series




Model					
2m	QE12-N5F2	QE12-N5F2-U	2m	QE12-N5G2	QE12-N5G2-U
5m	QE12-N5F5	QE12-N5F5-U	5m	QE12-N5G5	QE12-N5G5-U
20m	QE12-N5F20	QE12-N5F20-U	20m	QE12-N5G20	QE12-N5G20-U

Connector			
Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-30℃...90℃		

Connection Cable			
Material	PVC	PU	Core wire
			5*0.34mm²(0.2*11)
Colour	Black		Length
			2m/5m/20m
Cable diameter	Φ5.2mm		

Dimensions

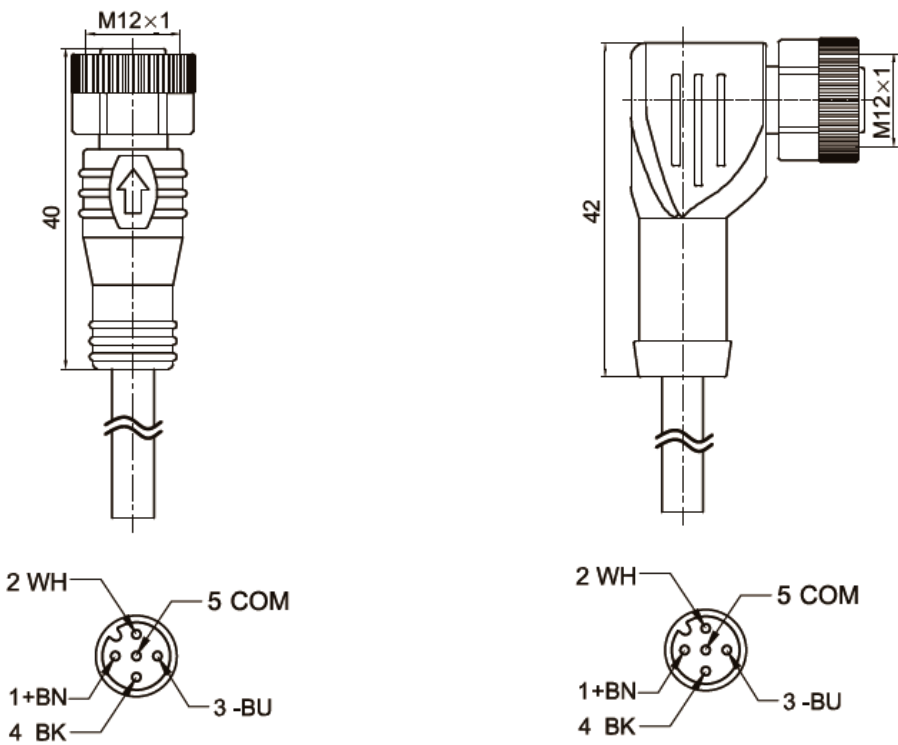


Connection Cable **QE12** series



Model					
2m	QE12-N3F2	QE12-N3F2-U	2m	QE12-N3G2	QE12-N3G2-U
5m	QE12-N3F5	QE12-N3F5-U	5m	QE12-N3G5	QE12-N3G5-U

Connector				
Supply voltage	250VAC/DC		Outer covering	PVC
Nominal current	4A		Beareing material	Nickel copper alloy
Insulation resistance	100MΩ		Protection degree	IP67
Temperature range	-10°C...80°C			
Connection Cable				
Material	PVC	PU	Core wire	3*0.34mm²(0.2*11)
Colour	Black		Length	2m/5m
Cable diameter	Φ4.4mm			

Dimensions

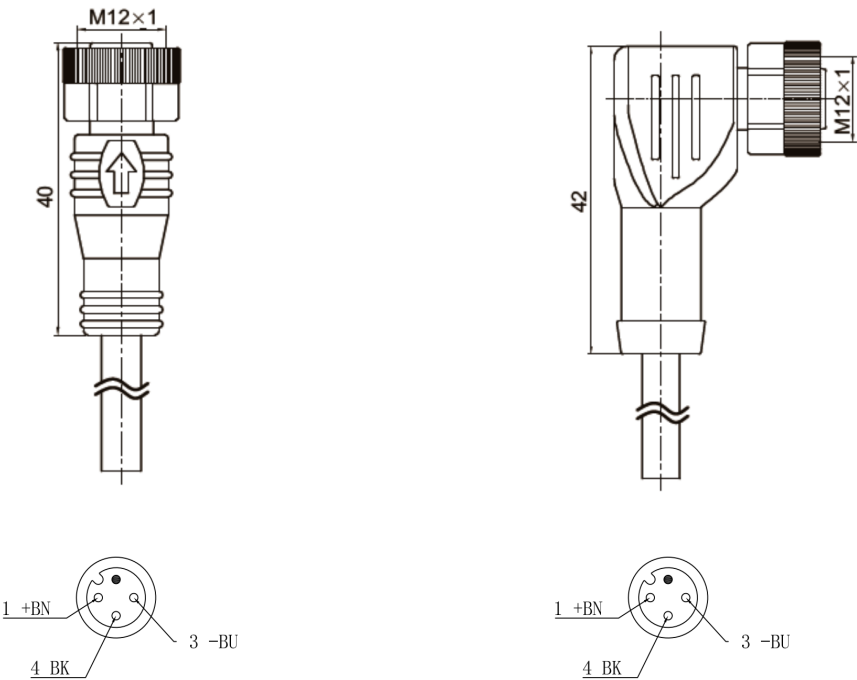

Connector QE12 series







Model

QE12-N4F	QE12-N4G
----------	----------

Connector

Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...6mm

Dimensions

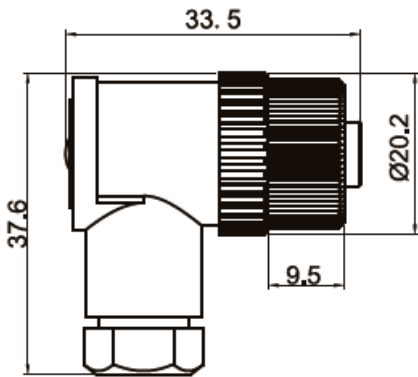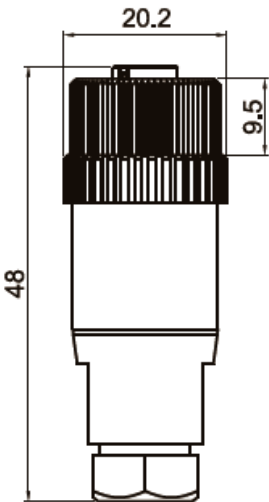



Connector **QE12** series



Model			
	QE12-W5F		QE12-W5G

Connector			
Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Beareing material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...6mm

Dimensions

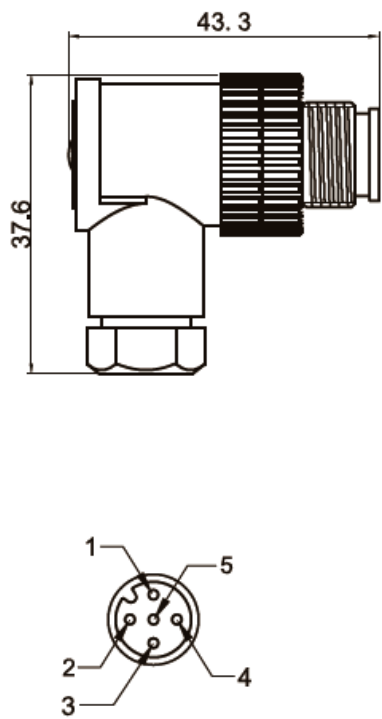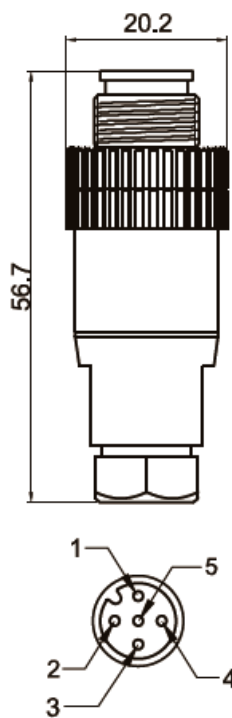

Connector QE12 series







Model

	QE12-W4F		QE12-W4G
--	----------	--	----------

Connector

Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...6mm

Dimensions

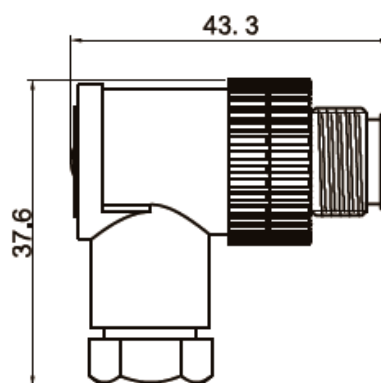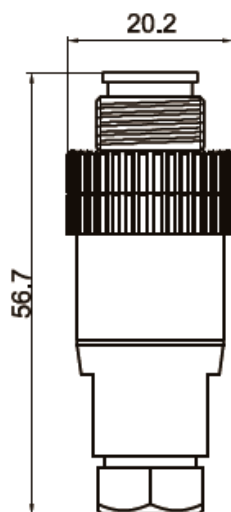

Connector QE12 series




Model

	QE12-N5F		QE12-N5G
--	----------	--	----------

Connector

Supply voltage	250VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...6mm

Dimensions

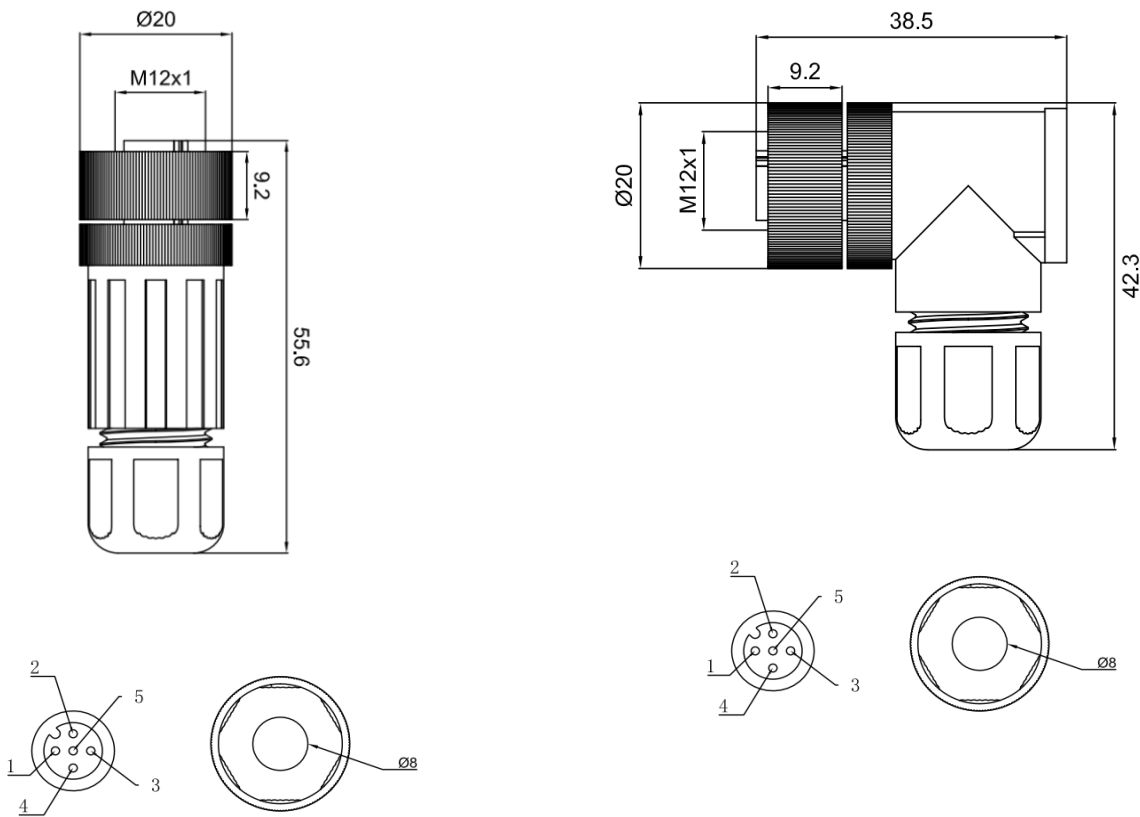

Connector QE8 series






Model

	QE8-N3F		QE8-N4F
--	---------	--	---------

Connector

Supply voltage	60VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...5mm

Dimensions

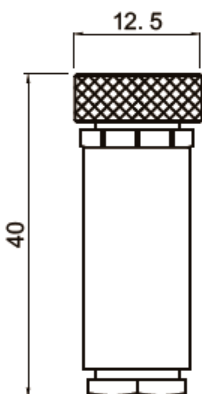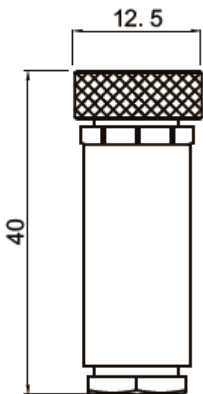




Connector QE8 series



Model			
	QE8-W3F		QE8-W4F

Connector			
Supply voltage	60VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-40°C...85°C	Wirable	4...5mm

Dimensions

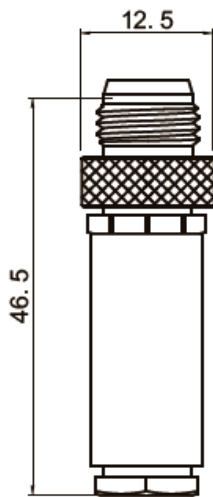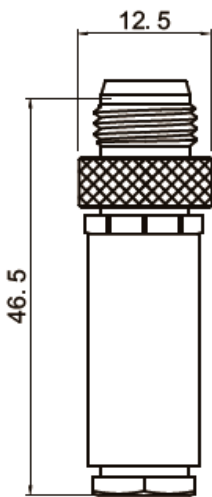





Connector QE8 series



Model			
	QE8-W3G		QE8-W4G

Connector			
Supply voltage	60VAC/DC	Outer covering	PVC
Nominal current	4A	Bearering material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-25°C...85°C	Wirable	3.5...5mm

Dimensions

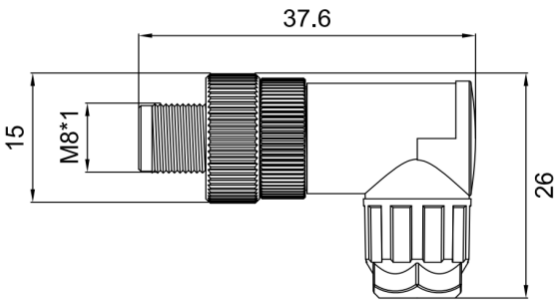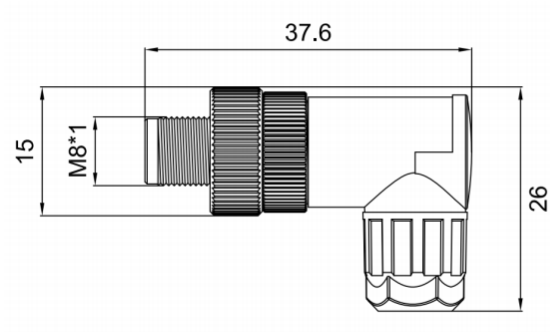

Connector QE8 series







Model

QE8-N3G	QE8-N4G
---------	---------

Connector

Supply voltage	60VAC/DC	Outer covering	PVC
Nominal current	4A	Beareing material	Nickel copper alloy
Insulation resistance	100MΩ	Protection degree	IP67
Temperature range	-25°C...85°C	Wirable	3.5...5mm

Dimensions

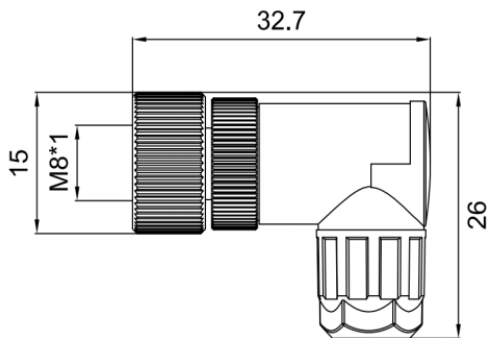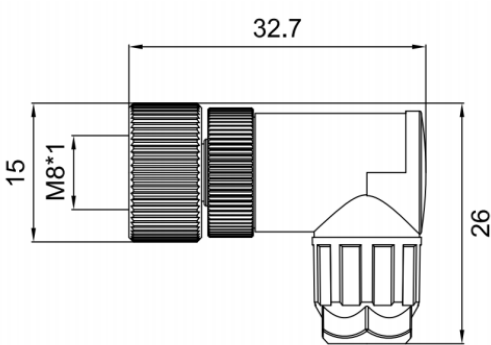

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ahj@nt-rt.ru || сайт: <https://lanbao.nt-rt.ru/>